



FAP FJORD AVIATION PRODUCTS

306 Anders Lane, Kemah, Texas 77565
Office: (281)334-4228 Fax: (281)538-2807 Toll Free: (800)880-3535
www.fjordav.com

MODEL DC 2.5/3 or DC 2.5/3-P DUST COVERS for 2 1/2" 3 LUG FUEL LOADING ADAPTER

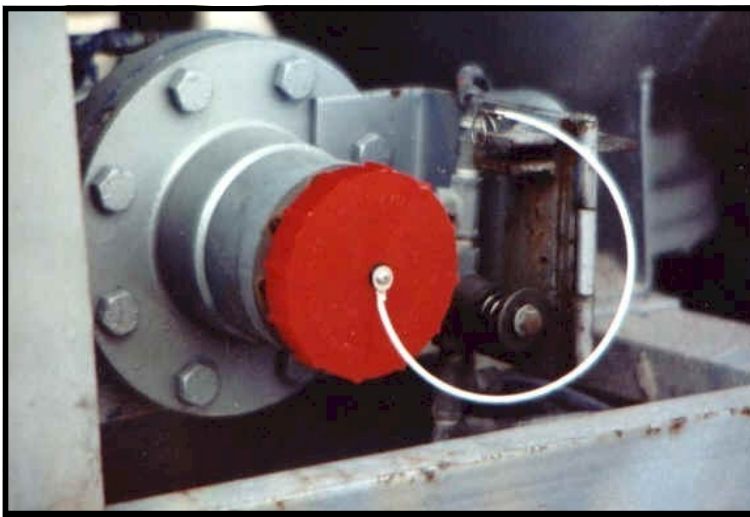

Bottom Loading / Recirculation

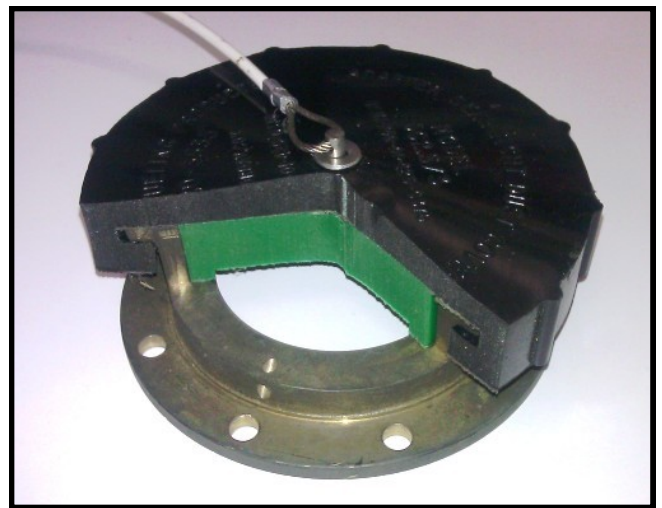

DC 2.5/3-P (cut away view)

- DC2.5/3 for general applications (NSN: 5340-01-425-6376) (Wt.=8oz)
- Durable impact absorbing Urethane-polymer
- UV · Fuel · Chemical resistant
- Flame retardant · Non-combustible
- Approved by all major oil companies, airlines and fuel service operations
- Stainless lanyard assembly
- DC2.5/3-P for pressure and vacuum sealing applications (NSN: 5340-01-425-6325) (Wt.=10oz)
- Positive locking feature
- Excellent for interlock safety control
- -20° F to 200° F Service Integrity
- Exceeds FAA and Military standards
- 2 year warranty (lanyard not included)
- Please specify color when ordering:
DC 2.5/3: Black or Red
DC 2.5/3-P: Black or Red